QND5-20

24V DC | DIMMABLE | CUTTABLE | CUSTOMIZABLE | IP67

Features:

- SMD 5050 LED
- 2OZ Rolled Copper
- Little voltage drop enables 20 meters serial connection
- Uniform light, dot-free, shadowless
- Round surface, high brightness, far luminous distance
- Various color option in white, blue, green, red, orange, yellow etc.
- RGB controller can realize dreamy change of color and brightness
- Silicone extrusion with smooth surface
- Anti-UV and excellent weather resistibility
- Bendable, suitable for complex lighting condition

Applications:

- Signage lighting
- Outdoor decoration lighting Architecture lighting

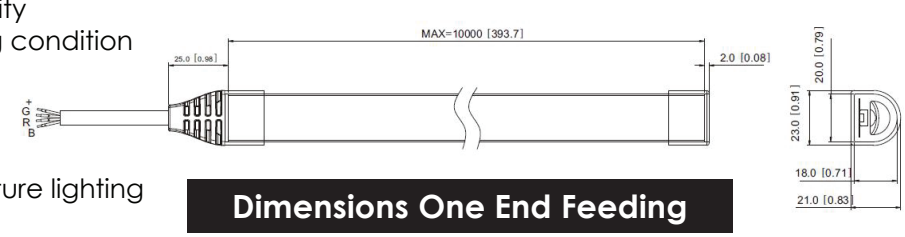

Dimensions One End Feeding

Dimensions Two End Feeding

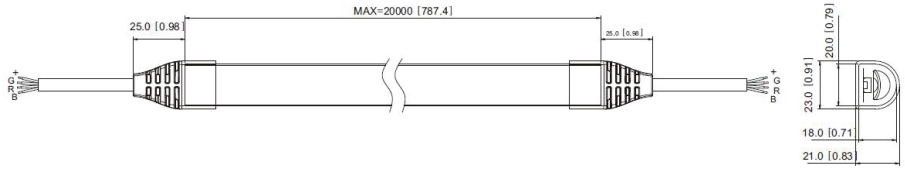

Product Specification

Model Number	QND5-20
Input Voltage	24V DC
Series Connection Length	10M One End Feed 20M Two Ends Feed
LED	5050 RGB
IP Level	IP67
Dimmable	External Controller Support
Minimum Cuttable Length	2.46"
Beam Angle	147°
Bending Diameter	7.87"
Working temperature	-68~+140°F
Warranty	3 Years

QND5-20 REV.030519

Specifications are subject to change without notice.