

ID-2835-288-40





Features:

- Super-bright 2835 SMD, minimum 15lm per diode
- 24V DC input
- Standard packaging is 16.5ft reel, customizable size available
- 3M adhesive tape in the back for easy mounting
- Universal Color Consistency

Applications:

- Widely used in advertisement and exhibit application
- Ideal for architectural and landscape lighting
- Edge-light transparent or diffused materials
- Highlight path and contour marking

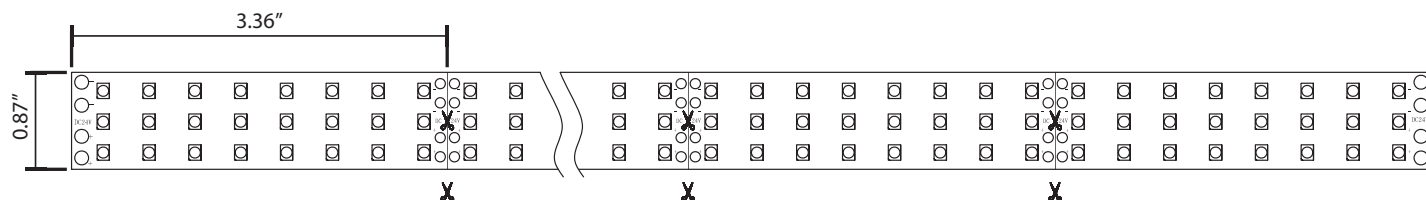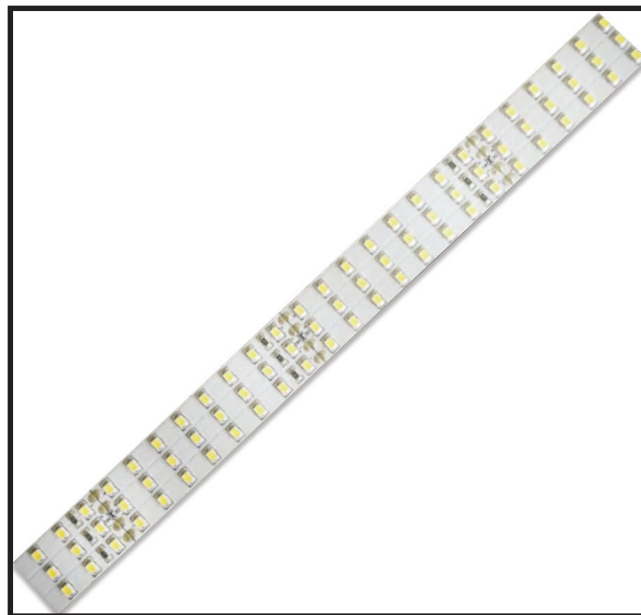

Product Specification

Model Number	ID-2835-288-24-40W
LEDs/m	SMD 2835 x 288pcs
Voltage	24V DC
Power Consumption/ft	≤8.64W
Lumen's Output(lm)/ft	865.45
CRI	≥80
Beam Angle	120°
Cuttable	Every 24 LED/83.3mm(3.28")
Dimmable	Yes
Operating Temperature	-13° to 140° F
Color Available	2,700K*, 2,900K*, 3,400K*, 4,200K*, 5,100K*, 5,700K*, 6,300K*, and 6,500k*

*Also available for special order